

- suitable for TOP and SUB due to bridged NLT4 plugs
  - robust connectors with metal shells
  - conductor cross-section: 2.5 mm<sup>2</sup>
  - adapts a 4-way speaker multicore to 2 single speaker signals
  - suitable for d&b
  - Z2292.002 adapter NLT4M to 2x NLT4F
- geeignet für TOP und SUB durch gebrückte NLT4 stecker
  - robuste steckverbinder mit metall gehäuse
  - leiterquerschnitt: 2,5 mm<sup>2</sup>
  - adaptiert ein 4-fach lautsprecher multicore auf 2 einzelne lautsprecher signale
  - passend für d&b
  - Z2292.002 adapter NLT4M auf 2x NLT4F



technical data / technische daten


**cable**  
**cable typ** 2x LY225S (2x 2.5 mm<sup>2</sup>) speaker cable  
**cable jacket** PVC  
**cross section** 2.5 mm<sup>2</sup>

**connectors**  
**connector 1** 1x speakON 4p. male / Neutrik  
**connector 2** 2x speakON 4p. female / Neutrik

**kabel**  
**kabeltyp** 2x LY225S (2x 2,5 mm<sup>2</sup>) lautsprecher kabel  
**kabelmantel** PVC  
**querschnitt** 2,5 mm<sup>2</sup>

**steckverbinder**  
**anschluss 1** 1x speakON 4p. male / Neutrik  
**connector 2** 2x speakON 4p. female / Neutrik

SYT4M-T4FB  
 Line Array Adapter TOP & SUB

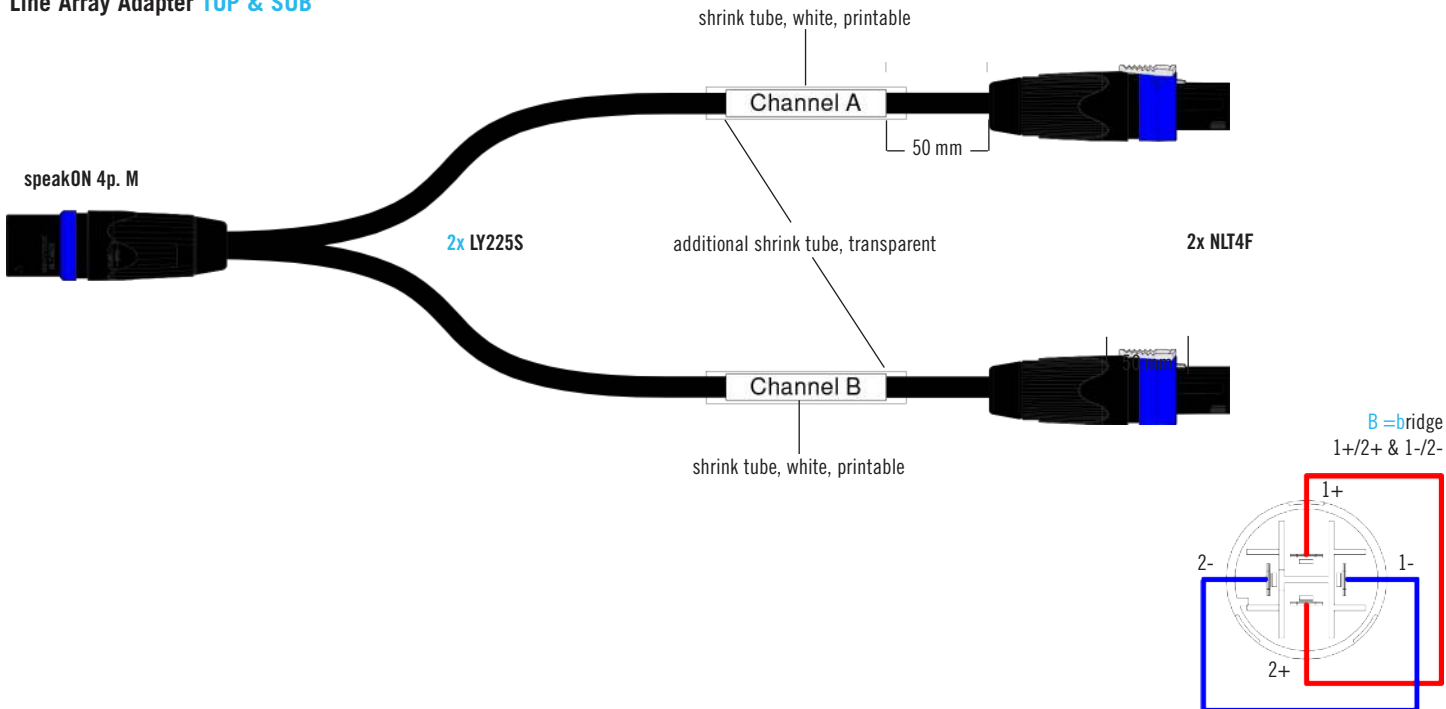

order / variations / bestellung / variationen

| order code<br>bestell-nr. | fanout length<br>spleißlänge [mm] | type<br>typ | input<br>input      | output<br>output      | colour<br>farbe |
|---------------------------|-----------------------------------|-------------|---------------------|-----------------------|-----------------|
| SYT4M-T4FB-00.6           | 600                               | TOP / SUB   | 1x speakON 4p. male | 2x speakON 4p. female | black / schwarz |
| SYT4M-T4FB-01.5           | 1500                              | TOP / SUB   | 1x speakON 4p. male | 2x speakON 4p. female | black / schwarz |
| SYT4M-T4FB-Y018           | 600 / 1200                        | TOP / SUB   | 1x speakON 4p. male | 2x speakON 4p. female | black / schwarz |