

- suitable for TASCAM™, MACKIE, YAMAHA, FOCUSRITE...
 - PW..X, Ø 0.22 mm², high flexible studio multicore, XLPE insulation (cross-linked PE)
 - D-Sub 25p. male, metal shell
 - XLR 3p. male - sparkling bronze metallic plastic shell
 - heat shrink clear, both-sided for free labelling
 - additional screws M 2.5 for YAMAHA (Europa)
- geeignet für TASCAM™, MACKIE, YAMAHA, FOCUSRITE...
 - PW..X, Ø 0.22 mm², hochflexibles studio anschluss kabel, XLPE isolation (vernetztes polyethylen)
 - D-Sub 25p. male, metall gehäuse
 - XLR 3p. male - sparkling bronze metall plastik gehäuse
 - schrumpfschlauch transparent, beidseitig zur freien beschriftung
 - zusätzliche D-Sub schrauben M 2.5 für YAMAHA (Europa)



technical data


cable
channels 8
cable typ PW..X, Ø 0.22 mm², high flexible studio multicore, XLPE insulation (cross-linked PE)
jacket PVC, soft, matt

connectors
connector 1 D-Sub 25p. male, metal shell
contact 1 gold-plated
colour code white
connector 2 XLR 3p. male - sparkling bronze metallic plastic shell
contact 2 silver-plated
manufacturer Neutrik
screw joint UNC 4-40

technische daten

kabel
kanäle 8
kabeltyp PW..X, Ø 0.22 mm², hochflexibles studio anschluss kabel, XLPE isolation (vernetztes polyethylen)
mantel PVC, soft, matt

steckverbinder
anschluss 1 D-Sub 25p. male, metall gehäuse
kontakt 1 vergoldet
farbcode weiß
anschluss 2 XLR 3p. male - sparkling bronze metall plastik gehäuse
kontakt 2 versilbert
hersteller Neutrik
verschraubung UNC 4-40

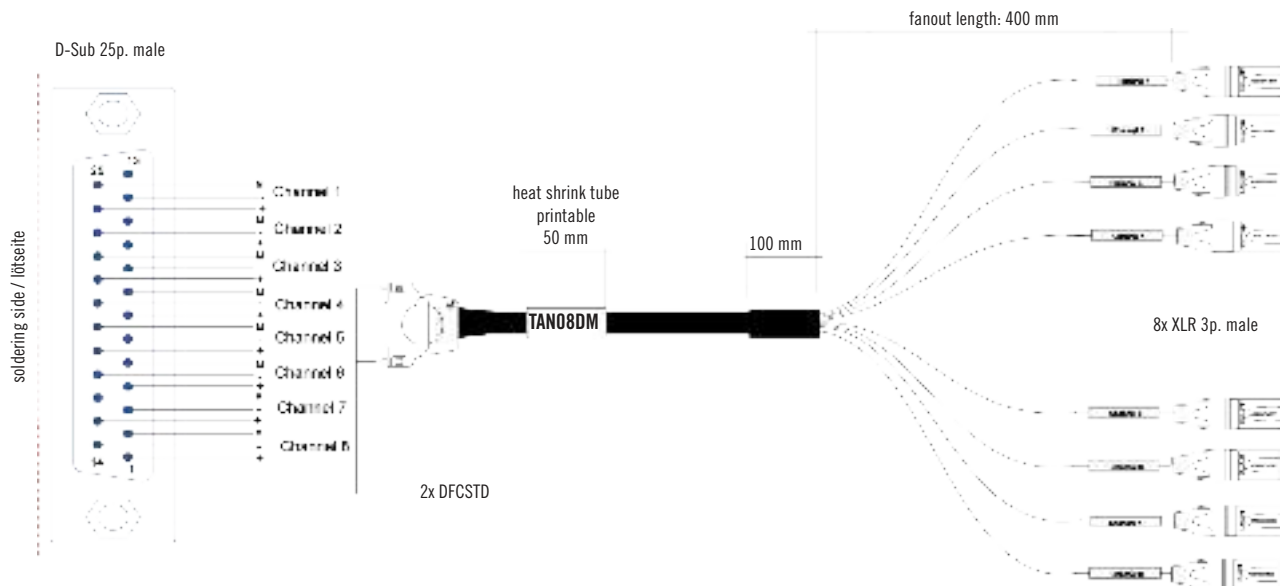

order / variations

bestellung / variationen

order code bestell-nr.	connector 1 anschluss 1	connector 2 anschluss 2	colour farbe	length länge [m]	fanout length spleiß länge [mm]
TAN08DM01.0	D-Sub 25p. male	8x XLR 3p. male, Neutrik	black / schwarz	1	400
TAN08DM03.0	D-Sub 25p. male	8x XLR 3p. male, Neutrik	black / schwarz	3	400
TAN08DM05.0	D-Sub 25p. male	8x XLR 3p. male, Neutrik	black / schwarz	5	400
TAN08DM10.0	D-Sub 25p. male	8x XLR 3p. male, Neutrik	black / schwarz	10	400